

Internal SSDs | Portable SSDs | External Hard Drives | DRAM Modules | Apple Solutions | Body Cameras | Dashcams | USB Flash Drives | Memory Cards | Card Readers, DVD Writers & Accessories

Index



01 About Transcend

- 02 Internal SSDs PCIe M.2 SSDs | SATA III M.2 SSDs | mSATA SSDs | 2.5" SSDs
- 08 Portable SSDs ESD series
- 10 External Hard Drives Portable Hard Drives | Desktop External Hard Drive | Accessories
- 13 DRAM Modules DDR5 | DDR4 | DDR3
- 16 Apple Solutions Expansion Cards for Mac | SSD Upgrade Kits for Mac

- 19 Body Cameras DrivePro Body series | Accessories
- 23 Dashcams Dual Camera Dashcam | DrivePro series | Accessories | Motorcycle Dashcam
- 27 USB Flash Drives USB 3.2 Gen 1/3.1 Gen 1 | USB 2.0

29 Memory Cards

SD Cards | microSD Cards | CFexpress Card | CFast 2.0 Card | CompactFlash Cards

32 Card Readers, DVD Writers & Accessories

Card Readers | DVD Writers | Hubs & Adapter

36 Exclusive Software

PC Toolboxes | Mobile Apps

About Transcend

At Transcend Information, we believe in simplifying your digital life with cutting-edge technology. Our range of over 2000 products, including internal SSDs, portable SSDs, DRAM modules, dashcams, body cameras, USB flash drives, memory cards, and more, is designed to enhance your digital experience like never before.

Our team of experts is passionate about creating innovative solutions that seamlessly integrate into your modernday lifestyle. From designing and developing to manufacturing, marketing, and selling, we take a hands-on approach to ensure that our products exceed your expectations.

Customer Centric

At Transcend, we're not just about technology, we're about the people who use it. That's why we prioritize your convenience, efficiency, and security with every product we create. With lightning-fast data transfer speeds, high-capacity storage, and top-of-the-line security features, we've got everything you need to simplify your digital life.

Top 25 Taiwan Global Brands

Transcend Information has been continuously recognized as one of the top 25 Taiwan brands since 2005, reflecting our ongoing commitment to innovation and excellence in the global technology market. We remain dedicated to providing our customers with the best possible products and services and pushing the boundaries of digital technology.

Made In Taiwan, Made with Quality

All Transcend products are proudly designed and manufactured in our state-of-the-art facilities in Taiwan, where we maintain complete control over the production process. Our dedication to quality and consistency ensures that you receive only the best, backed by our outstanding customer service and support.

Warranty Guaranteed

Transcend Information offers lifetime warranties for memory products and five-year warranties for portable and external storage products, backed by our industry-leading warranty program. Our customer service team is available to assist you with any questions or concerns. Choose Transcend for top-quality products and peace of mind.





Internal SSDs

PCIe M.2 SSDs









PCIe SSD 250H PCIe SSD 250S PCIe SSD 240S PCIe SSD 220S

Туре	M.2 2280			
Bus Interface		NVMe PCIe Gen4 x4	NVMe PCIe Gen3 x4	
Flash Type		3D NAM	ND Flash	
Dram Cache	• • •			•
Capacity	1TB~4TB	1TB~4TB	500GB / 1TB	256GB~2TB
Dimensions	80.0 x 23.1 x 9.2 mm	80.0 x 22.0 x 3.77 mm	80.0 x 22.0 x 3.77 mm	80.0 × 22.0 × 3.58 mm
Seq.read (Max)*	7,500 MB/s	7,500 MB/s	3,800 MB/s	3,500 MB/s
Seq. write (Max)*	6,700 MB/s	6,700 MB/s	3,200 MB/s	3,200 MB/s
4k random read*	540,000 IOPS	540,000 IOPS	370,000 IOPS	340,000 IOPS
4k random write*	440,000 IOPS	440,000 IOPS	560,000 IOPS	370,000 IOPS
Mean Time Between Failures (MTBF)*	3,000,000 hour(s)	3,000,000 hour(s)	2,000,000 hour(s)	2,000,000 hour(s)
Terabytes Written (TBW)*	3,120 TBW	3,120 TBW	1,700 TBW	4,400 TBW
Drive Writes Per Day (DWPD)	0.43 (5 yrs)	0.43 (5 yrs)	0.95 (5 yrs)	1.2 (5 yrs)
Operating Temperature	0°C (32°F) ~ 70°C (158°F)			
Warranty	Five-year Limited Warranty			
Ordering Information	TS1TMTE250H 1TB TS2TMTE250H 2TB TS4TMTE250H 4TB	TS1TMTE250S 1TB TS2TMTE250S 2TB TS4TMTE250S 4TB	TS500GMTE240S 500GB TS1TMTE240S 1TB	TS256GMTE220S 256GB TS512GMTE220S 512GB TS1TMTE220S 1TB TS2TMTE220S 2TB





PCIe SSD 115S



PCIe SSD 110S&112S



PCIe SSD 110Q



PCIe SSD 400S



PCIe SSD 300S

M.2 2280			M.2 2242	M.2 2230
		NVMe PCle Gen3 x4		
3D NAND Flash	3D NAND Flash	QLC NAND flash	3D NAND Flash	3D NAND Flash
- 250GB~2TB	- 128GB~2TB	- 500GB / 1TB	- 256GB~1TB	- 256GB / 512GB
Single-sided: 80.0 x 22.0 x 2.23 mm Double-sided: 80.0 x 22.0 x 3.58 mm	Single-sided: 80.0 x 22.0 x 2.23 mm Double-sided: 80.0 x 22.0 x 3.58 mm	80.0 × 22.0 × 3.58 mm	Single-sided: 42.0 x 22.0 x 2.23 mm	Single-sided: 30.0 x 22.0 x 2.23 mm
3,200 MB/s	2,500 MB/s	2,000 MB/s	2,000 MB/s	2,000 MB/s
2,000 MB/s	1,700 MB/s	1,500 MB/s	1,700 MB/s	1,100 MB/s
200,000 IOPS	200,000 IOPS	170,000 IOPS	102,000 IOPS	90,000 IOPS
250,000 IOPS	250,000 IOPS	250,000 IOPS	275,000 IOPS	220,000 IOPS
2,000,000 hour(s)	2,000,000 hour(s)	2,000,000 hour(s)	2,000,000 hour(s)	2,000,000 hour(s)
800 TBW	800 TBW	300 TBW	400 TBW	200 TBW
0.2 (5 yrs)	0.2 (5 yrs)	0.27 (3 yrs)	0.21 (5 yrs)	0.21 (5 yrs)
		0°C (32°F) ~ 70°C (158°F)		
Five-year Limited Warranty	Five-year Limited Warranty	Three-year Limited Warranty	Five-year Limited Warranty	Five-year Limited Warranty
TS250GMTE115S 250GB TS500GMTE115S 500GB TS1TMTE115S 1TB TS2TMTE115S 2TB	MTE110S TS128GMTE110S 128GB TS256GMTE110S 256GB TS512GMTE110S 512GB TS1TMTE110S 1TB TS2TMTE110S 2TB MTE112S 256GB TS512GMTE112S 512GB TS256GMTE112S 512GB TS512GMTE112S 512GB TS11MTE112S 1TB	TS500GMTE110Q 500GB TS1TMTE110Q 1TB	TS256GMTE400S 256GB TS512GMTE400S 512GB TS1TMTE400S 1TB	TS256GMTE300S 256GB TS512GMTE300S 512GB



SATA III M.2 SSDs







M.2 SSD 832S

M.2 SSD 830S

M.2 SSD 825S

Туре	M.2 2280			
Bus Interface	SATA III 6Gb/s			
Flash Type		3D NAND flash		
DRAM Cache	• • -			
Capacity	256GB~1TB	128GB~4TB	250GB~2TB	
Dimensions	Single-sided: 80.0 x 22.0 x 2.23 mm	80.0 x 22.0 x 3.58 mm	80.0 x 22.0 x 3.58 mm	
Seq.read (Max)*	560 MB/s	560 MB/s	560 MB/s	
Seq. write (Max)*	500 MB/s 520 MB/s 500 MB/s		500 MB/s	
4k random read*	85,000 IOPS 90,000 IOPS 55,000 IOPS		55,000 IOPS	
4k random write*	85,000 IOPS 85,000 IOPS 80,000 IOPS		80,000 IOPS	
Mean Time Between Failures (MTBF)*	2,000,000 hour(s)			
Terabytes Written (TBW)*	560 TBW 2,240 TBW 720 TBW		720 TBW	
Drive Writes Per Day (DWPD)	0.3 (5 yrs) 0.3 (5 yrs) 0.3 (3 yrs)		0.3 (3 yrs)	
Operating Temperature	0°C (32°F) ~ 70°C (158°F)			
Warranty	Five-year Limited Warranty	Five-year Limited Warranty	Three-year Limited Warranty	
Ordering Information	TS256GMTS832S 256GB TS512GMTS832S 512GB TS1TMTS832S 1TB	TS128GMTS830S 128GB TS256GMTS830S 256GB TS512GMTS830S 512GB TS1TMTS830S 1TB TS2TMTS830S 2TB TS4TMTS830S 4TB	TS250GMTS825S250GBTS500GMTS825S500GBTS1TMTS825S1TBTS2TMTS825S2TB	





mSATA SSDs







mSATA SSD 230S

mSATA SSD 220S

mSATA SSD 370S

Bus Interface	SATA III 6Gb/s		
Flash Type	3D NAND flash	3D NAND flash	MLC NAND flash
DRAM Cache	•	-	•
Capacity	64GB~512GB	64GB~256GB	16GB~256GB
Seq.read (Max)*	560 MB/s	560 MB/s	530 MB/s
Seq. write (Max)*	500 MB/s	500 MB/s	400 MB/s
4k random read*	65,000 IOPS	65,000 IOPS	70,000 IOPS
4k random write*	85,000 IOPS	83,000 IOPS	70,000 IOPS
Mean Time Between Failures (MTBF)*	2,000,000 hour(s)		
Terabytes Written (TBW)*	280 TBW	83 TBW	740 TBW
Drive Writes Per Day (DWPD)	0.5 (3 yrs)	0.3 (3 yrs)	2.5 (3 yrs)
Operating Temperature	0°C (32°F) ~ 70°C (158°F)		
Warranty		Three-year Limited Warranty	
Ordering Information	TS64GMSA230S 64GB TS128GMSA230S 128GB TS256GMSA230S 256GB TS512GMSA230S 512GB	TS64GMSA220S 64GB TS128GMSA220S 128GB TS256GMSA220S 256GB	TS16GMSA370S16GBTS32GMSA370S32GBTS64GMSA370S64GBTS128GMSA370S128GBTS256GMSA370S256GB



2.5" SSDs



Bus Interface			SATA III 6Gb/s		
Flash Type	3D NAND flash	3D NAND flash	3D NAND flash	QLC NAND flash	MLC NAND flash
DRAM Cache	•	•	-	-	٠
Capacity	1TB / 2TB	128GB~4TB	250GB~2TB	500GB~2TB	32GB~1TB
Seq.read (Max)*	560 MB/s	560 MB/s	560 MB/s	550 MB/s	530 MB/s
Seq. write (Max)*	480 MB/s	520 MB/s	500 MB/s	500 MB/s	460 MB/s
4k random read*	82,000 IOPS	90,000 IOPS	55,000 IOPS	81,000 IOPS	75,000 IOPS
4k random write*	80,000 IOPS	89,000 IOPS	80,000 IOPS	80,000 IOPS	75,000 IOPS
Mean Time Between Failures (MTBF)*			2,000,000 hour(s)		
Terabytes Written (TBW)*	2,000 TBW	2,240 TBW	720 TBW	400 TBW	2,940 TBW
Drive Writes Per Day (DWPD)*	0.55 (5 yrs)	0.3 (5 yrs)	0.3 (3 yrs)	0.19 (3 yrs)	2.5 (3 yrs)
Operating Temperature			0°C (32°F) ~ 70°C (158°	°F)	
Warranty	Five-year Limited Warranty	Five-year Limited Warranty	Three-year Limited Warranty	Three-year Limited Warranty	Three-year Limited Warranty
Ordering Information	TS1TSSD250N 1TB TS2TSSD250N 2TB	TS128GSSD230S 128GB TS256GSSD230S 256GB TS512GSSD230S 512GB TS1TSSD230S 1TB TS2TSSD230S 2TB TS4TSSD230S 4TB	TS250GSSD225S 2500 TS500GSSD225S 5000 TS1TSSD225S 1TB TS2TSSD225S 2TB	TS500GSSD2200 500GB	TS32GSSD370S 32GB TS64GSSD370S 64GB TS128GSSD370S 128GB TS256GSSD370S 256GB TS512GSDD370S 512GB TS1TSSD370S 1TB



Free download of Transcend Elite App/ Software

Portable SSDs

ESD380C



Introducing the ESD380C from Transcend - the ultimate portable solid state drive for the modern digital lifestyle. Encased in military green silicone rubber, this sleek and rugged drive boasts lightning-fast transfer rates thanks to its USB 3.2 Gen 2x2 interface.

With high capacity and compatibility, the ESD380C is the perfect choice for secure and portable storage on the go. Whether you're a creative professional or a digital enthusiast, the ESD380C delivers unparalleled performance and convenience.

- USB 3.2 Gen 2x2 interface with the support of UASP (USB Attached SCSI Protocol)
- Suitable for desktop, laptop computers, OTG mobile devices and gaming consoles
- USB Type-C and USB Type-C to Type-A cable included

Dimensions	96.5 mm x 53.6 mm x 12.5 mm
Weight	75 g
Flash Type	3D NAND Flash
USB Type	USB Type-C to USB Type-A USB Type-C to USB Type-C
Connection Interface	USB 3.2 Gen 2x2
Performance*	Seq. read: 2,000 MB/s Seq. write: 2,000 MB/s
Operating Temperature	0°C (32°F) ~ 60°C (140°F)
Warranty	Five-year Limited Warranty

ransce

*Performance varies by capacity, user hardware, and system configuration.

TS500GESD380C	500GB
TS1TESD380C	1TB
TS2TESD380C	2TB
TS4TESD380C	4TB

Portable SSDs



USB Type-A	USB Туре-С			
Ordering Information				

TS250GESD370C 250GB TS500GESD370C 500GB TS1TESD370C 1TB

ESD370C

Dimensions	96.5 mm x 53.6 mm x 12.5 mm
Weight	87 g
Flash Type	3D NAND Flash
USB Type	USB Type-C to USB Type-A USB Type-C to USB Type-C
Connection Interface	USB 3.1 Gen 2
Performance*	Seq. read: 1,050 MB/s Seq. write: 950 MB/s
Operating Temperature	0°C (32°F) ~ 60°C (140°F)
Warranty	Three-year Limited Warranty





Ordering Information

I	1TB	Transcend Solid State Drive	
and the second sec			

TS256GESD310C	256GB
TS512GESD310C	512GB
TS1TESD310C	1TB

ESD310C

Dimensions	71.3 mm x 20 mm x 7.8 mm
Weight	11 g
Flash Type	3D NAND Flash
USB Type	USB Type-C USB Type-A
Connection Interface	USB 10Gbps
Performance*	Seq. read: 1050 MB/s Seq. write: 950 MB/s
Operating Temperature	0°C (32°F) ~ 60°C (140°F)
Warranty	Five-year Limited Warranty





1TB

Ordering Information TS250GESD270C 250GB TS500GESD270C 500GB

TS1TESD270C



Transcend

TS250GESD260C	250GB
TS500GESD260C	500GB
TS1TESD260C	1TB

ESD260C

Dimensions	81.4 mm x 33.6 mm x 7.5 mm
Weight	33 g
Flash Type	3D NAND Flash
USB Type	USB Type-C to USB Type-A USB Type-C to USB Type-C
Connection Interface	USB 3.1 Gen 2
Performance*	Seq. read: 520 MB/s Seq. write: 460 MB/s
Operating Temperature	0°C (32°F) ~ 60°C (140°F)
Warranty	Three-year Limited Warranty

ESD270C

Dimensions	77 mm x 55.7 mm x 9.6 mm
Weight	35 g
Flash Type	3D NAND Flash
USB Type	USB Type-C to USB Type-A USB Type-C to USB Type-C
Connection Interface	USB 3.1 Gen 2
Performance*	Seq. read: 520 MB/s Seq. write: 460 MB/s
Operating Temperature	0°C (32°F) ~ 70°C (158°F)
Warranty	Three-year Limited Warranty



Free download of Transcend Elite Software

Transcend

External Hard Drives

Portable Hard Drives


StoreJet 25C3S/C3N

Introducing the StoreJet 25C3 from Transcend - where refined luxury meets dependable external storage. This sleek and lightweight drive features a premium alloy housing and Transcend Elite software for easy file backups from cloud storage platforms like Dropbox* and Google Drive**. Elevate your external storage game today with StoreJet 25C3 from Transcend.

- USB 3.1 Gen 1 interface
- Sleek aluminum alloy housing
- Up to 2TB of storage capacity
- Supports Transcend Elite software
- Three-year Limited Warranty

*Dropbox is a trademark of Dropbox Inc. **Google Drive is a trademark of Google Inc.





StoreJet 25C3S

Dimensions	114.5 mm x 78.5 mm x 9.95 mm
Weight	133 g
Storage Media	2.5" HDD
USB Type	USB Type-C to USB Type-A USB Type-C to USB Type-C
Operating Temperature	5°C (41°F) ~ 55°C (131°F)
Warranty	Three-year Limited Warranty



Ordering Information

TS1TSJ25C3N	1TE
TS2TSJ25C3N	2TE

StoreJet 25C3N

Dimensions	114.5 mm x 78.5 mm x 9.95 mm
Weight	136 g
Storage Media	2.5" HDD
USB Type	micro USB to USB Type-A
Operating Temperature	5°C (41°F) ~ 55°C (131°F)
Warranty	Three-year Limited Warranty

Portable Hard Drives



DROP TESTED USB Type-A **USB Type-C** Ordering Information

TS2TSJ25M3C 2TB TS4TSJ25M3C 4TB

StoreJet 25M3C

Dimensions	2TB: 129.5 mm x 80.8 mm x 16.1 mm 4TB: 129.5 mm x 80.8 mm x 24.1 mm
Weight	2TB: 189 g 4TB: 294 g
Storage Media	2.5" HDD
USB Type	USB Type-C to USB Type-A USB Type-C to USB Type-C
Operating Temperature	5°C (41°F) ~ 55°C (131°F)
Warranty	Three-year Limited Warranty



DROP TESTED	tion
TS1TSJ25M3S	1TB
TS2TSJ25M3S	2TB
TS4TSJ25M3S	4TB
TS1TSJ25M3G	1TB

TS2TSJ25M3G

2TB

StoreJet 25M3

Dimensions	1TB / 2TB: 129.5 mm x 80.8 mm x 16.1 mm 4TB: 129.5 mm x 80.8 mm x 24.1 mm
Weight	1TB / 2TB: 185 g 4TB: 294 g
Storage Media	2.5" HDD
USB Type	micro USB to USB Type-A
Operating Temperature	5°C (41°F) ~ 55°C (131°F)
Warranty	Three-year Limited Warranty





Ordering Information

TS1TSJ25H3P	1TB
TS2TSJ25H3P	2TB
TS4TSJ25H3P	4TB
TS1TSJ25H3B	1TB
TS2TSJ25H3B	2TB
TS4TSJ25H3B	4TB

StoreJet 25H3

Dimensions	1TB / 2TB: 131.8 mm x 80.8 mm x 16.3 mm 4TB: 131.8 mm x 80.8 mm x 24.5 mm
Weight	1TB / 2TB: 191 g 4TB: 298 g
Storage Media	2.5" HDD
USB Type	micro USB to USB Type-A
Operating Temperature	5°C (41°F) ~ 55°C (131°F)
Warranty	Three-year Limited Warranty



Ordering Information

- TS1TSJ25A3K 1TB
- TS2TSJ25A3K 2TB
- □ TS1TSJ25A3W 1TB
- □ TS2TSJ25A3W 2TB

StoreJet 25A3

Dimensions	130.6 mm x 80.1 mm x 15.0 mm
Weight	1TB: 182 g 2TB: 196 g
Storage Media	2.5" HDD
USB Type	micro USB to USB Type-A
Operating Temperature	5°C (41°F) ~ 55°C (131°F)
Warranty	Three-year Limited Warranty

Desktop External Hard Drive

StoreJet 35T3

Transcend's 3.5-inch StoreJet delivers lightning-fast performance, vast storage space, and a range of functions designed to enhance your efficiency.

- USB 3.1 Gen 1 interface
- · Vertically-oriented design to save desk space
- Power-saving sleep mode
- LED indicator
- One Touch Auto-backup button
- Supports Transcend Elite and RecoveRx
- Three-year Limited Warranty

Accessories

SATA III 2.5" SSD/HDD Enclosure Kit





Ordering Information

TSOGSJ25CK3

StoreJet 25CK3

Dimensions	129.5mm x 80.8mm x 18.8mm	
Weight	108 g	
Connection Interface	USB 3.1 Gen 1	
Operating Temperature 0°C (32°F) ~ 70°C (158°F)		
Package Contents*	StoreJet 25CK3 Enclosure, micro USB to USB Type-A cable, 7mm to 9.5mm spacer, PH1 screwdriver, M2 mounting screws	
Warranty	Two-year Limited Warranty	

*The enclosure is suitable for 2.5 inch HDD or SSD up to 9.5 mm in height.

SATA III M.2 SSD Enclosure Kit



For M.2 SATA SSD

Ordering Information

TS-CM80S

*The M.2 SSD Enclosure Kit is not compatible with PCI-Express M.2 SSDs.




4TB

8TB

Ordering Information

TS4TSJ35T3

TS8TSJ35T3



Ordering Information


TSOGSJ25S3

StoreJet 25S3

Dimensions	129 mm x 79.9 mm x 13 mm
Weight	86 g
Connection Interface	USB 3.1 Gen 1
Operating Temperature	5°C (41°F) ~ 55°C (131°F)
Package Contents*	StoreJet 25S3 enclosure, micro USB to USB Type-A cable, mounting screws
Warranty	Two-year Limited Warranty



Dimensions	120.16mm x 33.6mm x 7.5mm	
Weight	41 g	
Connection Interface	USB 3.1 Gen 2	
Operating Temperature 0°C (32°F) ~ 70°C (158°F)		
Package Contents*	M.2 SSD enclosure, M.2 adapter, Type-C to Type-A USB cable (45cm), Metal plate, Aluminum sticker, Screwdriver, Mounting screws	
Warranty	Two-year Limited Warranty	

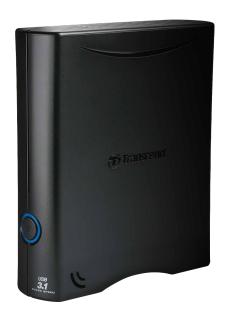

DRAM Modules

DDR5

Transcend's latest DDR5 DRAM modules conform to the JEDEC international standards and are equipped with top-notch chips and essential components. These modules undergo stringent reliability assessments to ensure uncompromised quality. DDR5 technology boasts of two autonomous 32-bit channels, enabling it to achieve impressive speeds of up to 5,600 MT/s. Additionally, the modules operate at a low voltage of 1.1V, supplemented by an onboard PMIC to minimize signal interference and power consumption. On-die ECC function actively detects and rectifies data errors, augmenting data integrity and overall system stability.



DDR5-5600 U-DIMM (JetRam)

PIN	288 pin
CAS Latency	CL46
Voltage	1.1V

Ordering Information

JM5600ALE-16G 16GB



DDR5-4800 U-DIMM (JetRam)

PIN	288 pin
CAS Latency	CL40
Voltage	1.1V

Ordering Information

JM4800ALG-8G	8GB
JM4800ALE-16G	16GB
JM4800ALE-32G	32GB



DDR5-5600 SO-DIMM (JetRam)

	· · · · · · · · · · · · · · · · · · ·
PIN	262 pin
CAS Latency	CL46
Voltage	1 11/

Ordering Information

IM5600ASE-16G 16GB



DDR5-4800 SO-DIMM (JetRam)

PIN	262 pin
CAS Latency	CL40
Voltage	1.1V

M4800ASG-8G	8GE
M4800ASE-16G	16GE
M4800ASE-32G	32GE

DDR4

Transcend's DDR4 DRAM modules deliver impressive transfer speeds of up to 3200 MT/s, significantly enhancing work efficiency. These modules are designed to cater to varying motherboard form factor requirements, available in both standard and small outline form factors. The modules incorporate the highest-quality chips and undergo rigorous testing to ensure optimal reliability and compatibility across diverse platforms.



DDR4-3200 U-DIMM (JetRam)

PIN	288 pin
CAS Latency	CL22
Voltage	1.2V

Ordering Information

JM3200HLH-4G	4GB
JM3200HLD-4G	4GB
JM3200HLB-8G	8GB
JM3200HLG-8G	8GB
JM3200HLB-16G	16GB
JM3200HLE-16G	16GB
JM3200HLE-32G	32GB

JM3200HLB-16GK JM3200HLE-32GK	16GB Kit (8GBx2) 32GB Kit (16GBx2)



DDR4-3200 SO-DIMM (JetRam)

PIN	260 pin
CAS Latency	CL22
Voltage	1.2V

Ordering Information

JM3200HSH-4G	4GB
JM3200HSB-8G	8GB
JM3200HSG-8G	8GB
JM3200HSB-16G	16GB
JM3200HSE-16G	16GB
JM3200HSE-32G	32GB



DDR4-3200 U-DIMM

PIN	288 pin
CAS Latency	CL22
Voltage	1.2V
Ordering Information	

TS3200HLB-8G	8GB
TS3200HLB-16G	16GB



DDR4-3200 SO-DIMM

PIN	260 pin
CAS Latency	CL22
Voltage	1.2V

Ordering Information

TS3200HSB-8G	8GB
TS3200HSB-16G	16GB



DDR4-2666 U-DIMM (JetRam)

PIN	288 pin
CAS Latency	CL19
Voltage	1.2V

Ordering Information

JM2666HLH-4G	4GB
JM2666HLB-8G	8GB
JM2666HLG-8G	8GB
JM2666HLB-16G	16GB
JM2666HLE-16G	16GB
JM2666HLE-32G	32GB

JM2666HLG-16GK 16GB Kit (8GBx2)



DDR4-2666 SO-DIMM (JetRam)

PIN	260 pin
CAS Latency	CL19
Voltage	1.2V

M2666HSH-4G	4GB
M2666HSB-8G	8GB
M2666HSG-8G	8GB
M2666HSB-16G	16GB
M2666HSE-16G	16GB
M2666HSE-32G	32GB

DDR4



DDR4-2666 U-DIMM

PIN	288 pin
CAS Latency	CL19
Voltage	1.2V

Ordering Information

TS2666HLH-4G	4GB
TS2666HLB-8G	8GB
TS2666HLB-16G	16GB
TS2666HLE-32G	32GB



DDR4-2666 SO-DIMM

PIN	260 pin
CAS Latency	CL19
Voltage	1.2V

Ordering Information

TS2666HSH-4G	4GB
TS2666HSB-8G	8GB
TS2666HSB-16G	16GB
TS2666HSE-16G	16GB
TS2666HSE-32G	32GB

DDR3

Transcend's DDR3 DRAM modules present an economical memory upgrade solution for the majority of prevalent desktop and notebook models. These modules feature the finest chips available and undergo rigorous testing to ensure optimal performance, endurance, reliability, and compatibility across diverse platforms.



DDR3-1600 U-DIMM (JetRam)

PIN	240 pin
CAS Latency	CL11
Voltage	1.5V

Ordering Information

JM1600KLN-2G	2GB
JM1600KLN-4G	4GB
JM1600KLH-4G	4GB
JM1600KLH-8G	8GB



DDR3-1333 U-DIMM (JetRam)

PIN	240 pin
CAS Latency	CL9
Voltage	1.5V

Ordering Information

JM1333KLU-2G	2GB
JM1333KLN-2G	2GB
JM1333KLN-4G	4GB
JM1333KLH-4G	4GB



DDR3-1600 SO-DIMM (JetRam)

PIN	204 pin
CAS Latency	CL11
Voltage	1.5V

Ordering Information

JM1600KSN-2G	2GB
JM1600KSN-4G	4GB



DDR3-1333 SO-DIMM (JetRam)

PIN	204 pin
CAS Latency	CL9
Voltage	1.5V

Ordering Information

JM1333KSN-4G 4GB



Apple Solutions

-0

Expansion Cards for Mac JetDrive[™] Lite

	Transcend JetDrive Lite 512GB	Transcend JetDrive Lite 1TB	Transcend JetDriveLite 256GB JetDrive [™] Lite 350	Transcend JetDriveLite 256GB
Performance ¹	Seq. read: 95 MB/s Seq. write: 75 MB/s	Seq. read: 95 MB/s Seq. write: 75 MB/s	Seq. read: 95 MB/s Seq. write: 55 MB/s	Seq. read: 95 MB/s Seq. write: 55 MB/s
Supported MacBook Model	MacBook Air 13" Late 2010~2017²	MacBook Pro 14" & 16" 2021~2023 and MacBook Pro (Retina)13" Late 2012~Early 2015	MacBook Pro (Retina)15" Mid 2012~Early 2013	MacBook Pro (Retina)15" Late 2013~Mid 2015
Operating Temperature	-25°C (-13°F) ~ 85°C (185°F)			
Warranty		Five-year Limited Warranty		
Ordering Information	TS128GJDL130 128GB TS256GJDL130 256GB TS512GJDL130 512GB	TS128GJDL330 128GB TS256GJDL330 256GB TS512GJDL330 512GB TS1TJDL330 1TB	TS128GJDL350 128GB TS256GJDL350 256GB	TS128GJDL360 128GB TS256GJDL360 256GB

¹ Performance varies by capacity, user hardware, and system configuration.

² Late 2010, Mid 2011, and Mid 2012 MacBook Air models have reduced performance as the card reader can only support up to USB 2.0 transfer speeds. *Apple, Mac, MacBook Pro, MacBook Air and Retina are trademarks of Apple Inc.



Scan QR Code for more information



SSD Upgrade Kits for Mac JetDrive[™]

Introducing Transcend's JetDrive SSDs - meticulously crafted to complement all Mac models that are upgradable with a new SSD. Our JetDrive SSDs come in both SATA and PCIe form factors, tailored to suit your specific needs. By upgrading to a JetDrive SSD, you'll experience a remarkable performance boost and an unprecedented storage capacity of up to 960GB. The upgrade process is made easy with our included installation tools and guide, ensuring a hassle-free experience. And here's the cherry on top - with Transcend's JetDrive SSD upgrade kits, you get an additional enclosure to repurpose your old SSD, giving you two SSDs for the price of one.



JetDrive 855

Dimensions	120 mm x 31.5 mm x 18.2 mm
Weight	88 g
Connection Interface	Thunderbolt 10 Gb/s
Interface	NVMe PCIe Gen3 x4
Flash Type	3D NAND flash
Operating Temperature	0°C (32°F) ~ 60°C (140°F)
Performance*	Seq. read: 1,600MB/s Seq. write: 1,400MB/s
Warranty Five-year Limited Warranty	

TS240GJDM855	240GB
TS480GJDM855	480GB
TS960GJDM855	960GB



JetDrive 850

Interface	NVMe PCIe Gen3 x4
Flash Type	3D NAND flash
Operating Temperature	0°C (32°F) ~ 60°C (140°F)
Performance*	Seq. read: 1,600MB/s Seq. write: 1,400MB/s
Warranty	Five-year Limited Warranty

Ordering Information

TS240GJDM850	240GB
TS480GJDM850	480GB
TS960GIDM850	960GB



JetDrive 825

Dimensions	120 mm x 31.5 mm x 18.2 mm
Weight	88 g
Connection Interface	Thunderbolt 10 Gb/s
Interface	AHCI PCIe Gen3 x2
Flash Type	3D NAND flash
Operating Temperature	0°C (32°F) ~ 60°C (140°F)
Performance*	Seq. read: 950MB/s Seq. write: 950MB/s
Warranty	Five-year Limited Warranty

Ordering Information

TS240GJDM825 TS480GJDM825 TS960GJDM825

240GB 480GB 960GB



JetDrive 725/720/520/500

Dimensions	JetDrive 725/720: 110.9 mm x 37.2 mm x 10.8 mm JetDrive 520/500: 130 mm x 28.2 mm x 10.8 mm	
Weight	JetDrive 725/720: 65 g JetDrive 520/500: 60 g	
Connection Interface	USB 3.1 Gen 1	
Interface	SATA III 6Gb/s	
Flash Type	MLC NAND flash	
Operating Temperature	0°C (32°F) ~ 70°C (158°F)	
Performance*	Seq. read: 570MB/s Seq. write: 460MB/s	
Warranty	Five-year Limited Warranty	
Enclosure Warranty	Two-year Limited Warranty	

Ordering Information

JetDrive 725		JetDrive 520	
TS240GJDM725	240GB	TS240GJDM520	240GB
TS480GJDM725	480GB	TS480GJDM520	480GB
TS960GJDM725	960GB		
JetDrive 720		JetDrive 500	
TS240GJDM720	240GB	TS240GJDM500	240GB
TS480GJDM720	480GB	TS480GJDM500	480GB

*Performance varies by capacity, user hardware, and system configuration.





JetDrive 820

ND flash
2°F) ~ 60°C (140°F)
ead: 950MB/s vrite: 950MB/s
ear Limited Warranty

Ordering Information

TS240GJDM820	240GB
TS480GJDM820	480GB
TS960GJDM820	960GB



JetDrive 420

Dimensions	129 mm x 80 mm x 13 mm
Weight	86 g
Connection Interface	USB 3.1 Gen 1
Interface	SATA III 6Gb/s
Flash Type	3D NAND flash
Operating Temperature	0°C (32°F) ~ 70°C (158°F)
Performance*	Seq. read: 570MB/s Seq. write: 470MB/s
Warranty	Five-year Limited Warranty
Enclosure Warranty	Two-year Limited Warranty

TS240GJDM420	240GE
TS480GJDM420	480GE





Free download of DrivePro Body App/Toolbox

Body Cameras



DrivePro Body 70

- High-sensitivity image sensor to record 2K QHD 1440P video
- Built-in GPS receiver for geotagging videos and images
- Built-in battery for up to 9 hours long recording time
- Compliant with IP68 and U.S. military standards to be dust-proof, waterproof, and shock resistant*
- · Connect to mobile devices easily and quickly
- Built-in Wi-Fi function for mobile live streaming

DrivePro Body 60

T Transcend

- High-sensitivity image sensor
- Built-in GPS receiver for geotagging videos and images
- Built-in battery for up to 10 hours long recording time
- Compliant with IP67 and U.S. military standards to be dust-proof, waterproof, and shock resistant*
- Connect to mobile devices easily and quickly
- Built-in Wi-Fi function for mobile live streaming

Ordering Information

TS64GDPB70A

Ordering Information

TS64GDPB60A 64GB

*Based on MIL-STD-810G 516.6-Transit Drop Test.

64GB

| Body Cameras | 19





DrivePro Body 30

- High-sensitivity image sensor
- Infrared LEDs for night vision
- Built-in battery for up to 12 hours of long recording time
- Compliant with IP67 and U.S. military standards to be dust-proof, waterproof, and shock resistant*
- Image enhancement technology



DrivePro Body 10

- High-sensitivity image sensor
- Infrared LEDs for night vision
- Built-in battery for up to 5 hours of recording time
- Compliant with U.S. military-grade shock resistance* and IPX4 water resistance

32GB

Quick snapshot button

Ordering Information

TS64GDPB30A

64GB

Ordering Information

TS32GDPB10B

*Based on MIL-STD-810G 516.6-Transit Drop Test.





DrivePro Body 70



Transcend



DrivePro Body 60 DrivePro Body 30

DrivePro Body 10

Dimensions	95.9 x 52.2 x 24.9 mm Camera: 48.6 x 40 x 31.7 mm	95.9 x 52.2 x 24.9 mm Camera: 61.3 x 22 x 22 mm	95.9 × 52.2 × 27.6 mm	88.4 x 52.2 x 19.6 mm
Weight	184 g	167 g	130 g	88 g
Capacity	64GB internal memory	64GB internal memory	64GB internal memory	32GB microSD card included
Viewing Angle	140° (diagonal)	130° (diagonal)	130° (diagonal)	130° (diagonal)
IP Rating	IP68	IP67	IP67	IPX4
Battery Life (Max.) ¹	9 hour(s)	10 hour(s)	12 hour(s)	5 hour(s)
Microphone	Built-in			
Infrared LEDs	-	-	4 LEDs	4 LEDs
Wi-Fi	•	•	•	-
GPS Receiver	•	•	-	-
Buffering Mode	•	•	•	-
Vibration Alert	•	•	•	-
Event Recording	-	-	-	•
Loop Recording	•	•	•	•
Resolution	2K QHD 1440P	Full HD 1080P	2K QHD 1440P	Full HD 1080P
USB Type	3.5mm plug to USB Type-A		micro USB to USB Type-A	
Frame Rate	30 fps	30 fps	60/30 fps ²	60/30 fps
Operating Temperature	-20°C (-4°F) ~ 60°C (140°F) -20°C (-4°F) ~ 65°C (149°F)			
Connection Interface	USB 2.0			
Video Format	MP4 (H.264)			
Warranty	Two-year Limited Warranty			

¹ Recording time may differ based on environmental conditions.

² 1440P→30fps; 1080P→60/30fps.



Optional Accessories

Docking Station



Accessory Kits



For DrivePro Body 70/60/30

Ordering Information

TS-DBK1

• 3.5mm to USB Type-A cable

For DrivePro Body 10

• micro-USB to USB Type-A cable

Ordering Information

360° rotating clip
Velcro holder

Velcro straps

TS-DBK4

- 360° rotating clip
- Velcro holder
- Velcro straps



For DrivePro Body 70/60/30/10 Ordering Information

TS-DBK2

For DrivePro Body

Ordering Information

70/60/30

TS-DPD6N

- Magnetic mounting kit
- MOLLE mount • Camera holder
- cumera noidei



Ordering Information

- TS-DBK5
- 3.5mm to USB Type-A cable

- A complete camera charging and data upload solution
- Six charging ports for supreme efficiency
- Upload data simultaneously
- Auto backup and unlock



Ordering Information

TS-DBK3

- Screwdriver
- Mounting screws
 Wearable cable
- wearable cable





Dual Camera Dashcam

DrivePro 620

Introducing the DrivePro 620, the ultimate dual dashcam that includes a front and rear camera. Equipped with highsensitivity image sensors, this exceptional dashcam delivers crystal-clear, sharp, and vivid images, even in low light conditions. Boasting 1440P 2K QHD recording at 60fps, you can rest assured that your critical shots are captured smoothly and clearly. The DrivePro 620 also comes with a range of built-in safety functions such as head-up display, emergency recording, and more, making it the ideal companion to protect your journey around the clock.

- Dual camera recording for all-round protection
- High-sensitivity image sensors
- 140° wide-angle view
- Built-in Wi-Fi connectivity
- GPS/GLONASS receiver to identify your location precisely
- · Built-in battery prevents losing crucial images in the event of a power outage
- Multiple functions, including snapshot, event recording, and time setting, are synchronized between two cameras

Ordering Information

TS-DP620A-32G 32GBx2 TS-DP620A-64G 64GBx2



Rear Camera



DrivePro 550

- High-sensitivity image sensors
- Dual lens recording
- Front lens with 150° wide viewing angle recording
- Four infrared LEDs for clear in-car recording in low light
- Built-in Wi-Fi connectivity
- Built-in GPS/GLONASS receiver

Ordering Information

TS-DP550B-64G 64GB



DrivePro 250

- High-sensitivity image sensor
- Built-in GPS/GLONASS receiver
- Built-in Wi-Fi connectivity
- 1440P Full HD recording at 60fps
- · Built-in battery ensures uninterrupted recording
- Parking mode

Ordering Information

TS-DP250A-32G	32GB
TS-DP250A-64G	64GB



DrivePro 110

- High-sensitivity image sensor
- 140° wide-angle lens for a broad field of view
- · Built-in battery ensures uninterrupted recording
- · Snapshot button to capture photos while recording
- Emergency recording
- Time-lapse recording

Ordering Information

TS-DP110M-32G 32GB TS-DP110M-64G 64GB



DrivePro[™] 10

- High-sensitivity image sensor for filming at night
- 140° wide angle lens for the best field of view
- Up to 1440P 2K QHD recording at 30fps
- Built-in battery ensures uninterrupted recording
- Built-in Wi-Fi connectivity
- Emergency recording

TS-DP10A-32G	32GB
TS-DP10A-64G	64GB









		DrivePro 550	DrivePro 250	DrivePro 110	DrivePro 10
	Lens (diagonal)	Front: 150° (diagonal) Rear: 130° (diagonal)	140° (diagonal)	140° (diagonal)	140° (diagonal)
Camera	Aperture	Front: F/2.2 Rear: F/2.0	F/2.0	F/2.0	F/2.0
camera	Resolution	Front: Full HD 1080P Rear: Full HD 1080P	2K QHD 1440P	2K QHD 1440P	2K QHD 1440P
	Frame Rate	60/30 fps	60/30 fps	60/30 fps ²	60/30 fps ²
Dual Lens	s Camera	•	-	-	-
Snapshot	Button	•	•	•	-
Lane Dep Warning		•	•	-	-
Forward (Warning S		•	•	-	-
Parking N	lode	•	•	-	-
Time-laps	e Recording	•	•	•	-
Heads-up	Display	•	•	-	-
Wi-Fi Fun	ction	•	•	-	•
Exclusive	Арр	•	•	-	•
GPS/GLOI Geolocati		•	•	-	-
Speed Ala	arm	•	•	-	-
G-Sensor		•	•	•	•
Infrared L	EDs	• ¹	-	-	-
Built-in Ba	attery	•	•	•	•
Display Ty	ype & Size	2.4" color LCD	2.4" color LCD	2.4" color LCD	-
Memory	Card Support ³		microSD up	o to 256GB	
Warranty	,		Two-year Lim	ited Warranty	

¹ Rear lens only.

² 1440P→30fps; 1080P→60/30fps.

³Transcend's High Endurance microSD cards are recommended to ensure the best recording performance.

Optional Accessories





Motorcycle Dashcam DrivePro 20

Introducing the DrivePro 20, specially designed for motorcycle and scooter riders. Its compact and straightforward design provides you with unparalleled security on the road. Equipped with a high-sensitivity image sensor, this dashcam delivers Full HD 1080P recording at 60fps, ensuring crystal-clear sharpness and vivid night images, even in low light conditions. With an IP68 rating, it is designed to endure various weather conditions, water, dust, heat, and shocks, making it ideal for outdoor recording. Additionally, the built-in Wi-Fi connectivity allows for live streaming of footage on mobile devices via the free DrivePro App. Its small and portable size makes it easy to carry around, making it an ideal dashcam for commuters and delivery drivers alike. Choose the DrivePro 20 for your security needs today.

Dimensions	90.2 mm x 30 mm x 30 mm
Weight	Camera Weight: 74 g Camera Holder Weight: 20 g
USB Type	micro USB to USB Type-A
Connection Interface	USB 2.0
Capacity	32GB / 64GB microSD card included
Viewing Angle	140° (diagonal)
Aperture	F/2.8
Operating Temperature	-10°C (14°F) ~ 60°C (140°F)
IP Rating	IP68
Power Supply (Max.)	DC input: 5V / 2A
Frame Rate	60/30 fps
Video Format	MP4 (H.264)
Battery Life (Max.)	2.5 hour(s)
Warranty	Two-year Limited Warranty

Ordering Information

TS-DP20A-32G 32GB TS-DP20A-64G 64GB

Universal applications





Free download of Transcend Elite App/ Software

USB Flash Drives

USB 3.2 Gen 1 / 3.1 Gen 1 Series

The JetFlash USB 3.2 Gen 1 / 3.1 Gen 1 series is designed to transfer files at a faster rate than ever before, with the ability to store larger quantities of data. These USB drives come in various styles, ranging from sleek to rugged and capless, to provide simplicity for both file management and everyday life.



JetFlash 930C

- Dual connector compatible with USB Type-A and Type-C devices
- High capacity up to 512GB
- Up to 420 MB/s read speed and 400 MB/s write speed
- Aluminum metallic housing with a golden hue
- Five-year Limited Warranty

Ordering Information

 TS128GJF930C
 128GB

 TS256GJF930C
 256GB

 TS512GJF930C
 512GB



Transcend

JetFlash 920

- Incredible performance and endurance into a compact USB form factor
- USB 3.2 Gen 1 interface
- High-quality durable metallic texture and aluminum body
- Up to 420 MB/s read, 400 MB/s write speed
- Transcend Elite data management software
- Five-year Limited Warranty

TS128GJF920	128G
TS256GJF920	256GE
TS512GJF920	512GE

USB 3.2 Gen 1 / 3.1 Gen 1

28GB

Ordering Information

TS32GJF810

TS64GJF810

TS128GJF810

JetFlash 810

JetFlash 780

8GB

16GB

32GB

64GB

Ordering Information

TS8GJF780

TS16GJF780

TS32GJF780

TS64GJF780

Transcend

32GB

64GB

128GB

MLC



JetFlash 890

Order	nation	
TS22C		22

1352016905	
TS64GJF890S	
TS128GJF890S	

32GB	
64GB	
128GB	



JetFlash 790

Ordering Information

■ TS16GJF790K	16GB	□ TS32GJF790W	32GB
TS32GJF790K	32GB	□ TS64GJF790W	64GB
TS64GJF790K	64GB	□ TS128GJF790W	128GB
TS128GJF790K	128GB		
TS256GJF790K	256GB		

■ TS512GJF790K 512GB



JetFlash 750

Transcend

64GB

Ordering Information

34GB MLC

TS16GJF750K	
TS32GJF750K	
TS64GJF750K	

16GB 32GB

MLC

TS4GJF720S 4GB TS8GIF720S 8GB TS16GJF720S 16GB TS32GJF720S 32GB

Ordering Information

JetFlash 720

TS32GJF710S TS64GIF710S TS128GJF710S TS256GJF710S

32GB 64GB 128GB 256GB



JetFlash 710

Ordering Information



JetFlash 790C Ordering Information

TS64GJF790C	64GB
TS128GJF790C	128GB
TS256GJF790C	256GB



JetFlash 760

Ordering Information

TS32GJF760	32GB
TS64GJF760	64GB
TS128GJF760	128GB
TS256GJF760	256GB
TS512GJF760	512GB



JetFlash 700/730

Ordering Information

TS16GJF700	16GB	□ TS32GJF730	32GB
TS32GJF700	32GB	□ TS64GJF730	64GB
TS64GJF700	64GB	□ TS128GJF730	128GB
■ TS128GJF700	128GB	□ TS256GJF730	256GB
■ TS256GJF700	256GB	□ TS512GJF730	512GB
■ TS512GJF700	512GB		

USB 2.0



JetFlash 600

Ordering Information

TS4GJF600	4GB
TS8GJF600	8GB
TS16GJF600	16GB
TS32GJF600	32GB



JetFlash 590

Ordering Information

16GB
32GB
64GB



JetFlash 380

Ordering Information

TS16GJF380S 16GB TS32GJF380S 32GB



JetFlash 350/370

TS4GJF350	4GB
TS8GJF350	8GB
TS16GJF350	16GB
 TS32GJF350 	32GB
TS64GJF350	64GB
□ TS32GJF370	32GB
🗆 TS64GJF370	64GB



(fine

Memory Cards

SD Cards

	8K4K4KUltra HDUltra HD		Ultra HD	
	Transcend [†] [®] Se ^Y ⁹⁰ 64 _{GB}	Transcend [†] © Se V30 3 Se I 128 GB	Transcend Ultra Performance A2 Se V30 3 C I 512gB	Ттапscend [•] © <u>У</u> зо 1 тв
	SDC700S	SDC500S	SDC340S	SDC300S
Flash Type	3D NAND flash	MLC NAND flash	3D NAND flash	32GB:~1TB: 3D NAND flash 4GB~16GB: 2D NAND flash
Capacity	32GB / 64GB	8GB~128GB	64GB~512GB	4GB~1TB
Read Speed (Max.)*	285 MB/s	95 MB/s	160 MB/s	100 MB/s
Write Speed (Max.)*	220 MB/s	45 MB/s	90 MB/s	85 MB/s
Speed Class	32GB: SDHC, V90, C10, U3 64GB: SDXC, V90, C10, U3	8GB~32GB: SDHC, C10, U1 64GB / 128GB: SDXC, C10, U3, V30	64GB: SDXC, U3, V30, A1 128GB~512GB: SDXC, U3, V30, A2	4GB~16GB: SDHC, C10 32GB: SDHC, C10, U1 64GB / 128GB: SDXC, C10, U1, V10 256GB~1TB: SDXC, C10, U3, V30
Ordering Information	TS32GSDC700S 32GB TS64GSDC700S 64GB	TS8GSDC500S 8GB TS16GSDC500S 16GB TS32GSDC500S 32GB TS64GSDC500S 64GB TS128GSDC500S 128GB	TS64GSDC340S 64GB TS128GSDC340S 128GB TS256GSDC340S 256GB TS512GSDC340S 512GB	TS4GSDC300S4GBTS8GSDC300S8GBTS16GSDC300S16GBTS32GSDC300S32GBTS64GSDC300S64GBTS128GSDC300S128GBTS256GSDC300S512GBTS512GSDC300S11B



microSD Cards

	Ultra HD Transcend 64GB C I © V30	Ultra HD Ultra Performance 256GB	Transcend 512gB Price I A1 V30	FULL HD Recording High Endurance 256GB [®] 弾発 3	1080P FULL HD Recording High Endurance 64 GB ^{© M} → C I
	USD500S	USD340S	USD300S	USD350V	USDC10V
Flash Type	MLC NAND flash	3D NAND flash	32GB~512GB: 3D NAND flash 4GB~16GB: 2D NAND flash	3D NAND flash	MLC NAND flash
Capacity	8GB~64GB	64GB~256GB	4GB~512 GB	32GB~256GB	16GB~64GB
Read Speed (Max.)*	95 MB/s	160 MB/s	100 MB/s	95 MB/s	95 MB/s
Write Speed (Max.)*	80 MB/s	125 MB/s	85 MB/s	45 MB/s	45 MB/s
Speed Class	8GB: microSDHC, C10, U1 16GB / 32GB: microSDHC, C10, U3, V30 64GB: microSDXC, C10, U3, V30	microSDXC, U3, V30, A2	4GB~16GB: microSDHC, C10 32GB / 64GB: microSDHC, C10, U1, A1 128GB~512GB: microSDXC, U3, V30, A1	32GB: microSDHC, C10, U1 64GB / 128GB: microSDXC, C10, U1 256GB: microSDXC, C10, U3	16GB / 32GB: microSDHC, C10, U1 64GB: microSDXC, C10, U1
Ordering Information	TS8GUSD500S 8GB TS16GUSD500S 16GB TS32GUSD500S 32GB TS64GUSD500S 64GB	TS64GUSD340S 64GB TS128GUSD340S 128GB TS256GUSD340S 256GB	With adapter TS16GUSD300S-A 16GB TS32GUSD300S-A 32GB TS64GUSD300S-A 64GB TS128GUSD300S-A 128GB TS256GUSD300S-A 256GB TS128GUSD300S-A 512GB TS256GUSD300S-A 512GB TS512GUSD300S-A 512GB Without adapter 5126G TS4GUSD300S 4GB TS4GUSD300S 8GB TS16GUSD300S 16GB TS32GUSD300S 32GB TS64GUSD300S 64GB TS128GUSD300S 128GB	TS32GUSD350V 32GB TS64GUSD350V 64GB TS128GUSD350V 128GB TS256GUSD350V 256GB	TS16GUSDHC10V 16GB TS32GUSDHC10V 32GB TS64GUSDXC10V 64GB



CFexpress Card



CFexpress 820

1700 MB/s read; 1300 MB/s write*

Ordering Information

TS256GCFE820 256GB TS512GCFE820 512GB

CFast Card



CFast 2.0 CFX650

510 MB/s read; 370 MB/s write*

Ordering Information

TS128GCFX650	128GB
TS256GCFX650	256GB

CompactFlash Cards



CompactFlash 1000

160 MB/s read; 120 MB/s write*

Ordering Information

TS16GCF1000	16GB
TS32GCF1000	32GB
TS64GCF1000	64GB
TS128GCF1000	128GB



CompactFlash 800

120 MB/s read; 60 MB/s write*

Ordering Information

TS32GCF800	32GE
TS64GCF800	64GI
TS128GCF800	128G
TS256GCF800	256GE



CompactFlash 133

50 MB/s read; 20 MB/s write*

Ordering Information

TS1GCF133	1GB
TS2GCF133	2GB
TS4GCF133	4GB
TS8GCF133	8GB
TS16GCF133	16GB
TS32GCF133	32GB



LICE Type

Card Readers, DVD Writers & Accessories

USB 3.2 Gen 1 / 3.1 Gen 1 Card Readers

RDC3	Transcend RDC8	(1) Transcend RDF9	() Transcend RDF8	ि Transcend RDF2	Transcord Transcord Transcord RDF5	RDE2
USB Type-C	micro USB to USB Type-C	micro	o USB to USB Ty	/pe-A	USB Type-A	USB Type-C to USB Type-A/ USB Type-C to USB Type-C

Transcend

Connection Interface Card Reader Slot(s)		USB Type-C	USB Type-C	micro USB to USB Type-A USB Type-A		озв туре-А	USB Type-C to USB Type-C	
		USB 3.2 Gen 1	USB 3.1 Gen 1			USB 3.2 Gen 2x2		
		SD / microSD	SD / m	nicroSD / Compa	ctFlash	CFast	SD / microSD	CFexpress Type B
	SD UHS-I and below	•	•	٠	•	-	•	-
	SD UHS-II	-	-	•	-	-		-
	microSD UHS-I and below	•	٠	٠	٠	-	٠	-
Compatibility UC be Co UC	CompactFlash UDMA5 and below	-	٠	٠	٠	-	-	-
	CompactFlash UDMA7 & UDMA6	-	•	•	•	-	-	-
	CFast 2.0 and below	-	-	-	-	٠	-	-
	CFexpress Type B	-	-	-	-	-	-	•
Warranty		Two-year Limited Warranty						
Ordering Information		TS-RDC3 Black	TS-RDC8K2 Black	TS-RDF9K2 Black	TS-RDF8K2 Black	TS-RDF2 Black	TS-RDF5K Black TS-RDF5W White TS-RDF5R Pink	TS-RDE2 Space gray



Slim Portable DVD Writer

Transcend's portable DVD writer is the ultimate companion for your thin-and-light laptops, netbooks, and Ultrabooks, enabling you to play movies, install software, and back up files while on the go. With its slim design, it is easy to carry around, providing convenience for your daily needs. Additionally, the DVD writer includes a free download of the CyberLink Media Suite 10 media writing software suite, adding even more value to your purchase.

- Ultra-slim, sleek design with rounded edges
- 8X DVD±R read/write, 24X CD-R/RW read/write
- Compatible with CD-R/RW, DVD±R, DVD±RW, DVD±R DL, M-DISC, DVD-RAM media formats
- Read and write dual layer discs
- Two-year Limited Warranty

	TS8XDVDS-K	Blacl
П	TS8XDVDS-W	White

Dimensions		142.8 mm x 148 mm x 13.9 mm					
Weight		264 g					
Drive Type		Built-in 9.5mm tray load					
Average Seek Time		DVD-ROM – 160ms, CD-ROM – 140ms					
Compatible Media		DVD-R, DVD+R, DVD-RW, DVD+RW, CD-R, CD+RW, DVD+R DL, DVD-R DL, DVD-RAM, M-DISC					
Maximum Read / Write Speed	(Read)	DVD±R: DVD±RW: DVD±R (DL): M-DISC: DVD ROM: DVD Video/Audio: DVD-RAM: CD-ROM/R/RW:	8X 8X 8X 8X 8X 4X 6X 24X	(Write)	DVD±R: DVD+RW: DVD-RW: DVD±R (DL): DVD-RAM: M-DISC: CD-R/RW:	8X 8X 6X 6X 5X 4X 24X	



Free download of RecoveRx Software

Hubs & Adapter



USB Type-C

Transcend's 6-in-1 USB Type-C Hub is designed to enhance the capabilities of your new Type-C mobile, tablet, laptop, MacBook, or iPad Pro 2018. Equipped with two USB-C ports, it allows for fast pass-through charging and data transfer, while also featuring two USB-A ports, an SD card slot, and a microSD card slot to cater to a wide range of peripheral devices. The hub employs the USB 3.1 Gen 2 interface in a Type-C connector, enabling mind-blowing transfer rates of up to 10Gb/s.

6-in-1 USB 3.1 Gen 2 Type-C Hub

- Perfect for Type-C mobiles, tablets, laptops, and new MacBooks
- 6-in-1 expansion
- Ultra-fast USB 3.1 Gen 2 data transfer (up to 10Gb/s)
- USB PD 60W pass-through charging
- Equipped with SDHC (UHS-II), SDXC (UHS-II), microSDHC (UHS-I), and microSDXC (UHS-I) card slots
- Two-year Limited Warranty



Ordering Information

TS-HUB5C Black



HUB2C

Reversible USB Type-C connector

- Reversible USB Type-C connector for greater ease of use
- USB 3.1 Gen 1 interface
- Transfer seamlessly between old and new devices
- Connect up to 4 Type-A devices at the same time
- Slim and portable design
- Two-year Limited Warranty

Ordering Information

TS-HUB2C Black



HUB2

USB bus powered

- USB 3.1 Gen 1 interface
- Transfer seamlessly between old and new devices
- Connect up to 4 Type-A devices at the same time
- Slim and portable design
- Two-year Limited Warranty

Ordering Information

TS-HUB2K Black



HUB3

Supports fast charging for iPad

- USB 3.1 Gen 1 interface
- Supports USB Battery Charging specification v1.2
- Provides 2A output current for fast charging iPad
- Two-year Limited Warranty

Ordering Information

TS-HUB3K Black



PCMCIA

CompactFlash adapter

- Converts 50-pin CompactFlash Card to 68-pin PCMCIA
- Fully compatible with Type I CompactFlash Cards
- Efficiently transfer data to a CompactFlash Card via any PC Card slot
- Two-year Limited Warranty

Ordering Information

TS0MCF2PC

Exclusive Software

PC Toolboxes



Transcend Elite

Instant backups, restore, encrypt/decrypt data, cloud backup, lock/unlock entire portable SSDs/ HDDs; compatible with macOS, Windows OS, and Android.

Supported Models

- Portable SSDs
- External Hard Drives
- USB Flash Drives



RecoveRx

Transcend's exclusive RecoveRx software features a user-friendly interface that allows you to search deep within a storage device for traces of erased files, including digital photos, documents, music and videos.

Supported Models

- Internal SSDs
- Portable SSDs
- External Hard Drives
- Memory Cards
- USB Flash Drives



SSD Scope

SSD Scope is an advanced and user-friendly software that makes it easier to maintain a healthy and efficient SSD. The useful features include: View Drive Information, View S.M.A.R.T. Status, Diagnostic Scan, Secure Erase, Firmware Update, TRIM Enable, Health Indicator and System Clone.



- Internal SSDs
- Portable SSDs
- CFast Cards
- CFExpress Cards



JetFlash Online Recovery

JetFlash Online Recovery is a repair tool developed for Transcend JetFlash USB flash drives. In an attempt to repair your flash drive when it is no longer recognized by PCs or not working properly, this tool provides the initial help by restoring your flash drive to its factory default settings.

Supported Models

USB Flash Drives



DrivePro Toolbox

Sort, select, and play back recorded videos, edit and trim videos, view driving paths on maps along with footage, license plate recognition.

Supported Models

Dashcams



DrivePro Body Toolbox

Adjust camera settings, sort, edit, and back up photos/videos, upgrade camera firmware, support webcam mode, smart detection.

Supported Models

Body Cameras



JetDrive Toolbox

Maintain a healthy SSD for Transcend's Apple Solutions products by keeping it up-to-date, preventing functional degradation, predicting problems before they happen, and offering recovery function for JetDrive Lite.

Supported Models

- JetDrive SSD Upgrade Kits for Mac
- Jetdrive Lite Expansion Cards for Mac

Mobile Apps



DrivePro App

Transcend's DrivePro App is designed specifically for use with DrivePro dashcam models featuring Wi-Fi connectivity. It allows streaming and downloading of recorded files to mobile devices. It can also do basic trimming of recorded video.

Supported Models

Dashcams



DrivePro Body App

Transcend's DrivePro Body App is designed specifically for the DrivePro Body cameras featuring Wi-Fi connectivity. It allows streaming and downloading of recorded files to mobile devices quickly and conveniently. It can also do basic trimming of recorded video.

Supported Models

Body Cameras



Transcend Elite App

Designed to work with Transcend's JetFlash USB OTG flash drives, card readers, portable SSDs, and Android devices that support USB On-The-Go, the app synchronizes your mobile devices, Transcend OTG product, portable SSDs and Transcend Elite PC toolbox. It offers cloud backup and disk lock function for your portable SSDs.

Supported Models

- Portable SSDs
- USB Flash Drives
- Card Readers

Scan QR Code for more information





TAIPEI

No. 70, XingZhong Rd., NeiHu Dist. Taipei, Taiwan Tel: +886-2-2792-8000 Fax: +886-2-2792-3375 E-mail: sales-tw@transcend-info.com

LOS ANGELES

1645 North Brian Street, Orange, CA 92867, U.S.A. Tel: +1-714-921-2000 Fax: +1-714-921-2111 E-mail: sales-us@transcend-info.com

SILICON VALLEY

2350 Mission College Blvd., Suite 1050, Santa Clara CA 95054, U.S.A. TEL: +1-408-785-5990 Fax: +1-714-921-2111 E-mail: sales-us@transcend-info.com

MARYLAND

10320 Little Patuxent Parkway, Suite 808 Columbia, MD 21044, U.S.A. Tel: +1-410-689-4900 Fax: +1-714-921-2111 E-mail: sales-us@transcend-info.com

THE NETHERLANDS

Cairostraat 40, 3047 BC Rotterdam, The Netherlands Tel: +31-10-298-8500 E-mail: sales-nl@transcend-info.com

GERMANY

Flughafenstrasse 52b (Airport-Center), 22335 Hamburg, Germany Tel: +49-40-538-907-0 Fax: +49-40-538-907-91 E-mail: sales-de@transcend-info.com

UNITED KINGDOM

Spaces, The Maylands Building (Office No64), Hemel Hempstead, HP2 7TG, United Kingdom Tel: +44-1442-501-026 E-mail: sales-uk@transcend-info.com

JAPAN

1-8-5, Kuramae, Taito-ku Tokyo 111-0051, Japan Tel: +81-3-5820-6000 Fax: +81-3-5820-6012 Email: sales-jp@transcend-info.com

KOREA

12F, CBS Bldg., 159-1, Mokdongseo-ro, Yangcheon-gu, Seoul, Korea, 07997 Tel: +82-2-782-8088 Fax: +82-2-782-8089 E-mail: sales-kr@transcend-info.com

BEIJING

A1501, E-Wing Center, No.113 Zhi Chun St, Haidian District, Beijing, China 100086 Tel: +86-10-8265-9969 Fax: +86-10-8265-0677 E-mail: office-bj@transcendchina.com

SHANGHAI


Room 801-802, T1 Building, Changning International, No. 1388, Kaixuan Road, Changning District, Shanghai, China 200052 Tel: +86-21-6161-9388 E-mail: office-sh@transcendchina.com

SHENZHEN

13B03 & 13B04 Anlian Building, No. 4018, Jintian Road, Futian District, Shenzhen, China 518031 Tel: +86-755-2598-7200 Fax: +86-755-2598-7270 E-mail: office-sz@transcendchina.com

HONG KONG

Unit 17-18, 10/F., Nan Fung Commercial Centre, 19 Lam Lok St., Kowloon Bay, Hong Kong, China Tel: +852-2331-8929 Fax: +852-2331-2987 E-mail: sales-hk@transcend-info.com

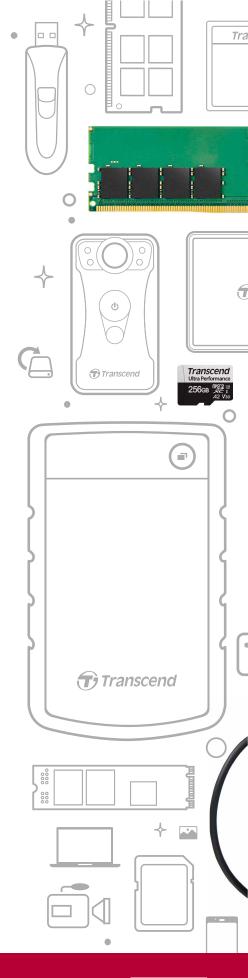



www.transcend-info.com